



NETWORK
METER

LOCAL
METER



RACK
SENSORS

BASIC



ArcTiv EZ-PDU

Basic & Metered Power Distribution Unit


BROCHURE

ArcTiv EZ-PDU

PRODUCT LINE OVERVIEW

The ArcTiv EZ-PDU is a value-line rack PDU series designed to power your critical IT infrastructure. The metered PDU's provide both network and local metered options and can be configured to meet your rack power needs.

Learn more are www.arctiv-tech.com/ezpdu

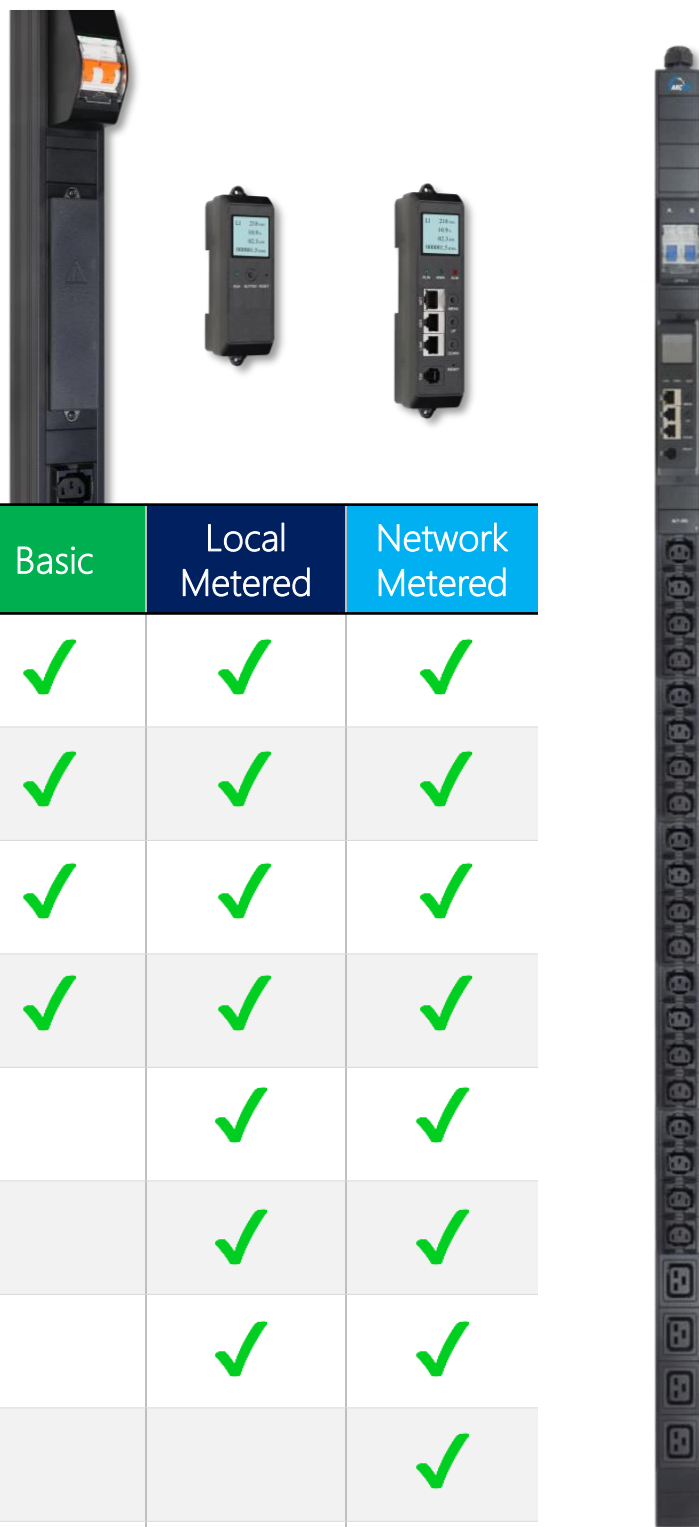

Features	Basic	Local Metered	Network Metered
Locking C13 Outlets Eliminates the need for locking cables	✓	✓	✓
International and Local Plugs / Outlets IEC, NEMA and custom options	✓	✓	✓
Tool-Less 0U Mounting Button-style mounting for fast installation	✓	✓	✓
2-Year Standard Warranty Factory warranty with full replacement	✓	✓	✓
Hot-Swap Meter Module Upgrade or replace without removing power		✓	✓
1% Metering Accuracy Measures total rack power consumption		✓	✓
LCD Screen Easy to read, navigate and configure		✓	✓
Remote Monitoring Real-time monitor rack power consumption			✓
Daisy Chain Connect up to 5 PDU's with a single IP address			✓

EZ-PDU with Network Meter

ArcTiv EZ-PDU

SPECIFICATIONS

FUNCTION		BASIC	LOCAL METERED	NETWORK METERED
Input	Rated Voltage	1P (IEC): 200VAC – 240VAC (50/60 Hz), 3P (IEC): 380VAC – 415VAC (50/60 Hz)		
	Plug Types	IEC60309 1P (16A, 32A), IEC60309 3P (16A, 32A), NEMA (Optional),		
	Cable Length	3 Meters		
	Protection	1-pole, 16A or 32A Air-Type Circuit Breakers (Optional)		
Output	Outlet Types	C13 (10A, Locking & Non-Locking), C19 (16A, Non-Locking), NEMA (Optional)		
	Rated Voltage	1P (IEC): 200VAC – 240VAC (50/60 Hz), 1P (NEMA): 100VAC (Optional)		
	Outlet Quantity	Up to 42 (Total), max 36 C13 locking outlets		
Metering	Input Power	N/A	Current, Voltage, 1% Accuracy	
	Environment		Temp / Humid	
	Daisy Chain		Master (1), Slave (4)	
	Displays		LCD Screen, 3 x LED's (Power On, Power Pulse, Alarm)	
	Sensors		Temperature, Humidity, Response: 400ms	
Alarms	Thresholds	N/A	Voltage, Input Current, Temp/Humid	
	Method		Display, Buzzer	Display, Buzzer, Web, Email, SNMP, LINE (optional)
	Logs		N/A	Voltage, Current, Temp/Humid
Networking	Remote Access	N/A	N/A	Web Based (Browser), Multi-User Permissions
	Communication			SNMP (V1,V2c,V3) , Http/Https, Telnet, Modbus-RTU, TFTP, SMTP
	Connectivity			100Mbps
	Firmware			Remote & Local Upgrade
	Ports			Net (RJ45), Serial (RJ45), Link (RJ45), Temp/Humid (RJ11)
Physical	Colors	Chassis & Outlet Modules: Black, Red, Blue		
	Dimensions	1579 x 56 x 44mm (Max Depth), Customized Lengths Available		
Environment	Operating	Temp: -10 ~ 45°C, Humidity: 5 to 95%, Altitude: 0 – 3,000m Altitude		
	Storage	Temp: -20 ~ 70°C, Humidity: 5 to 95%, Altitude: 0 – 15,000m Altitude		
Safety	Certifications	CE, RoHS, EMC, IEC, REACH		
	Warranty	2-year Repair or Replace		

Specifications shown are subject to change without any further notification.



www.arctiv-tech.com/



sales@arctiv-tech.com



facebook.com/arctivtechnologies



linkedin.com/company/arctiv-technologies



Power



Protect



Cool



Connect

ArcTiv Technologies is a global technology vendor whose mission is to **Power, Protect, Cool and Connect** your data center and edge-computing network infrastructure.

USA Address:

ArcTiv Technologies, LLC
30 N Gould St Ste 22117,
Sheridan, WY 82801
USA
e: sales@arctiv-tech.com

Taiwan Address:

ArcTiv Technologies, Ltd.
4F., No. 12, Ln. 345, Yangguang St.,
Neihu Dist., Taipei City 114 ,
Taiwan (R.O.C.)
e: james.chien@arctiv-tech.com

Bangladesh Address:

ArcTiv Technologies, Ltd.
Plot-155/1, 156, Road No. 1, Block-A,
Section-12, Pallabi, Dhaka, PO: 1216
Bangladesh
e: iftekhar.priyom@arctiv-tech.com

© 2021 ArcTiv Technologies, LLC. All rights reserved. ArcTiv and the ArcTiv logo are trademarks or registered trademarks of ArcTiv Technologies, LLC. While every precaution has been taken to ensure accuracy and completeness herein, ArcTiv Technologies LLC assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications are subject to change without notice.